
Anwendung/Application :

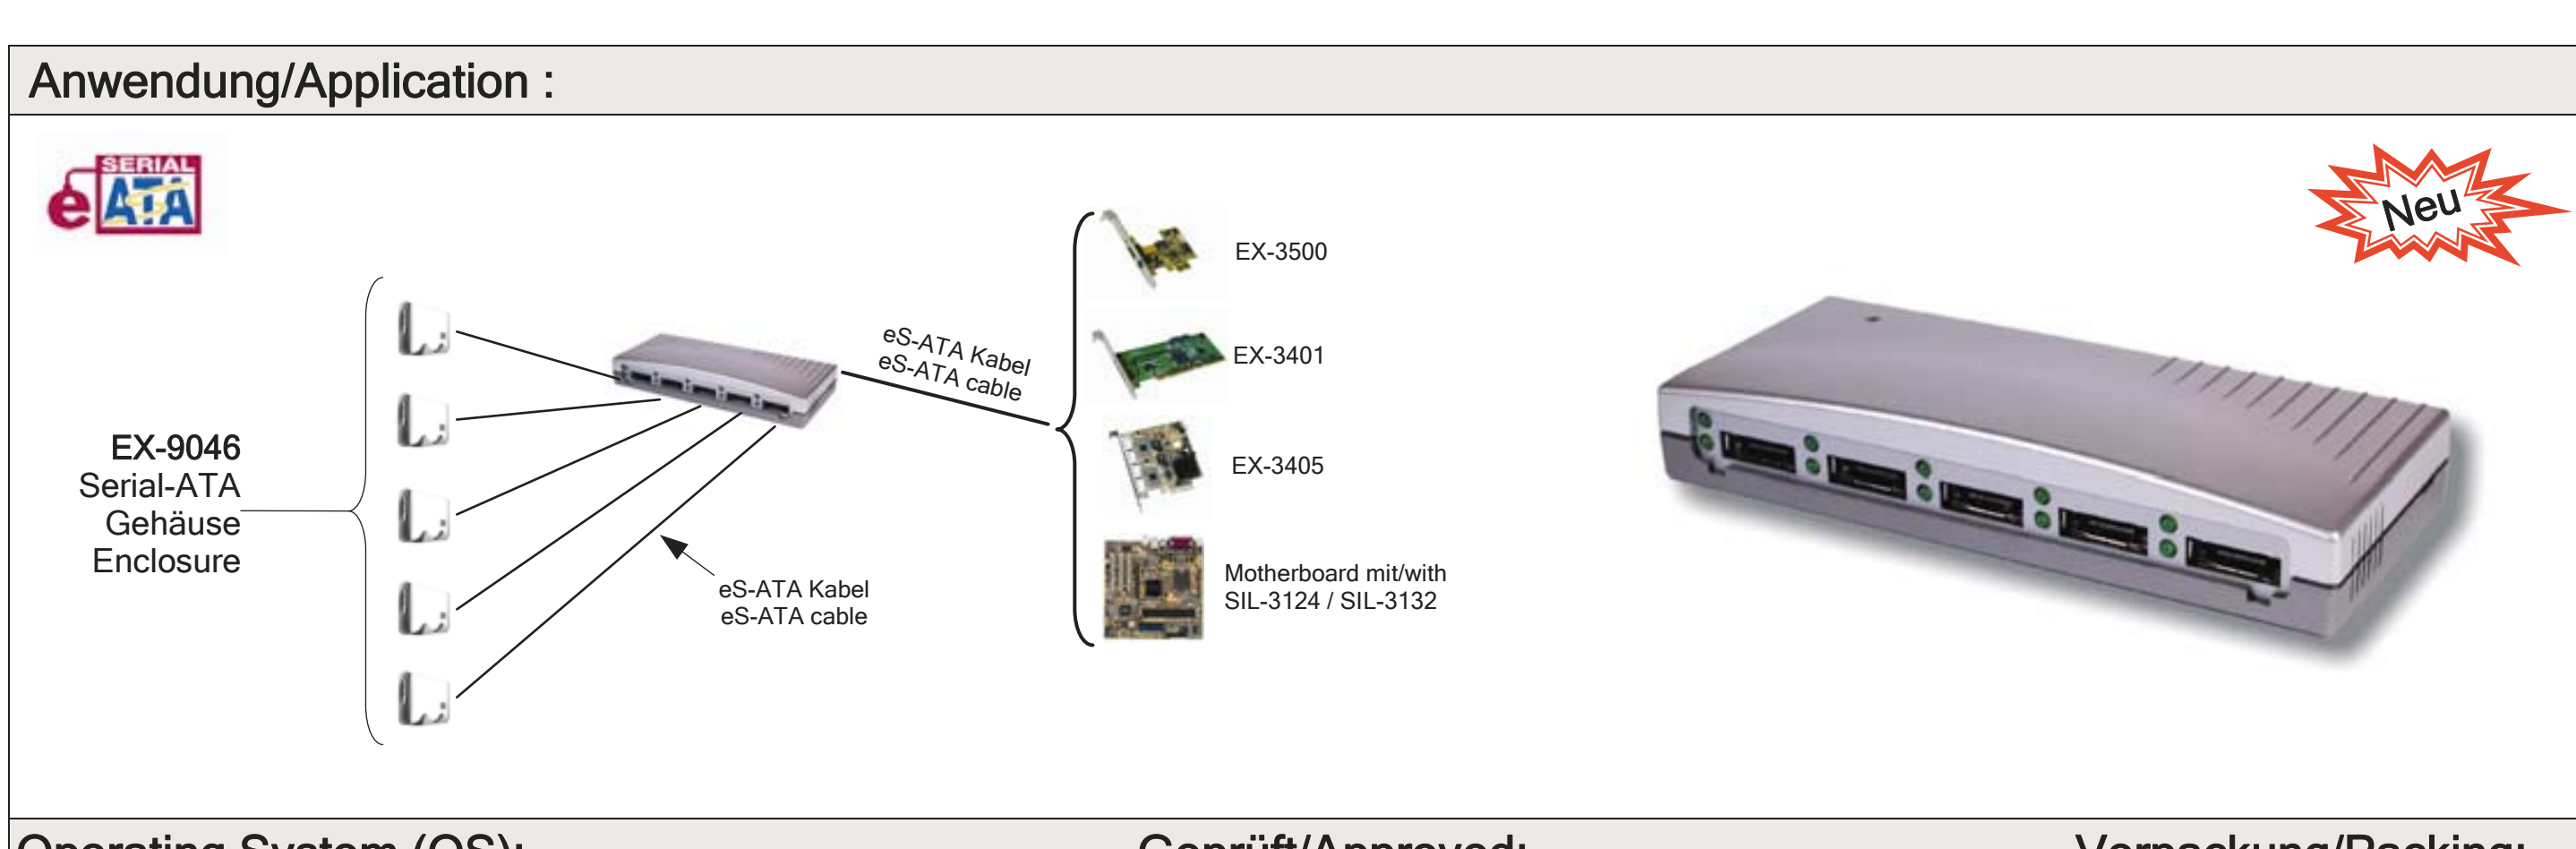

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
     	 	

eS-ATA II HUB mit 5 Ports

Beschreibung :	• Der EX-3460 1-to-5 native eS-ATA II Port HUB ist entwickelt worden, um bis zu 5 eS-ATA II Externe Festplatten Gehäuse an einen eS-ATA II Ausgang vom Computer System anzuschließen. Der EX-3460 HUB erweitert einen e-SATA II Upstream Port zu 5 Downstream eS-ATA II Ports. Der EX-3460 ist ein leistungsfähiger eS-ATA II HUB und ist die richtige Lösung um mehrere eS-ATA II Geräte mit Ihrem Computer System zu verbinden. • **Achtung !! EX-3460 arbeitet nur in Verbindung mit folgenden Chip-Sets in Ihrem Computer System: Silicon Image SIL3124 und SIL3132.** Optional bieten wir die Controller EX-3401, EX-3500 und EX-3504 an. Diese unterstützten den EX-3460.
Merkmale :	• HUB mit 1 Upstream zu 5 Downstream eS-ATA II Ports • Unterstützt Externe eS-ATA Anschlüsse • Unterstützt FIS-based und Command-based Switching Methods • LED Anzeige für Verbindung und Übertragung • Einfache Erweiterung eines eS-ATA Ports
Chip-Set :	• Silicon Image SIL-3726
Datentransfer-Rate :	• Bis 1.5Gb/s oder 3.0GB/s
Anschlüsse :	• 1 x 7 Pin eS-ATA II Upstream Port • 5 x 7 Pin eS-ATA II Downstream Ports • 1 x DC Power Stecker
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• 1 x eS-ATA Anschluss
Abmessung / Gewicht :	• 150 x 66.5 x 26 mm / 500g
Lieferumfang :	• EX-3460, 1 x 7 Pin eS-ATA Kabel, Netzteil, Handbuch

eS-ATA HUB with 5 ports

Description:	• The EX-3460 1-to-5 native eS-ATA II Port Multiplier is designed to provide a high performance link between a single eS-ATA II host port and 5 eS-ATA device ports. It expand one upstream eS-ATA II port to 5 downstream eS-ATA II ports. The EX-3460 HUB expand one eS-ATA II Upstream port to 5 Downstream eS-ATA II ports. The EX-3460 it's the best solution to connect up to 5 eS-ATA II device to your computer system. • **Attention !! EX-3460 works only with the following Chip-Set in your computer system: Silicon Image SIL3124 and SIL3132.** Optional we offer the controller EX-3401, EX-3500 and EX-3504. These supports the EX-3460.
Feature :	• HUB with 1 Upstream to 5 Downstream eS-ATA II ports • Support external eS-ATA connector • Support FIS-based and Command-based Switching Methods • Provides link and activity LED connectors • Easy expansion of one eS-ATA port
Chip-Set :	• Silicon Image SIL-3726
Data transfer rate :	• Up to 1.5Gb/s and 3.0Gb/s
Connectors :	• 1 x 7 pin eS-ATA II Upstream connector • 5 x 7 pin eS-ATA II Downstream connectors • 1 x DC Power connector
Operating Temperature : Operating Humidity :	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• 1 x eS-ATA connector
Size / Weight :	• 150 x 66.5 x 26 mm / 500g
Packaging contents :	• EX-3460, 1 x 7 Pin eS-ATA cable, Power Supply, Manual